

How to use user@domain on LDAP

版本	1.0
时间	2016 年 3 月
作者	陈敏俊 (mjchen@fortinet.com)
测试版本	FortiOS v5.2 MR2 Patch4
状态	草稿

目 录


目的.....	3
测试环境.....	错误!未定义书签。
设备配置.....	3
测试验证.....	错误!未定义书签。

目的

FortiGate 支持 UserPrincipalName - (UPN) , user@domain , 可以使用同一个用户名在不同的域中 , 在多域的

设备配置

1. LDAPbrower 中读取 UPN 属性

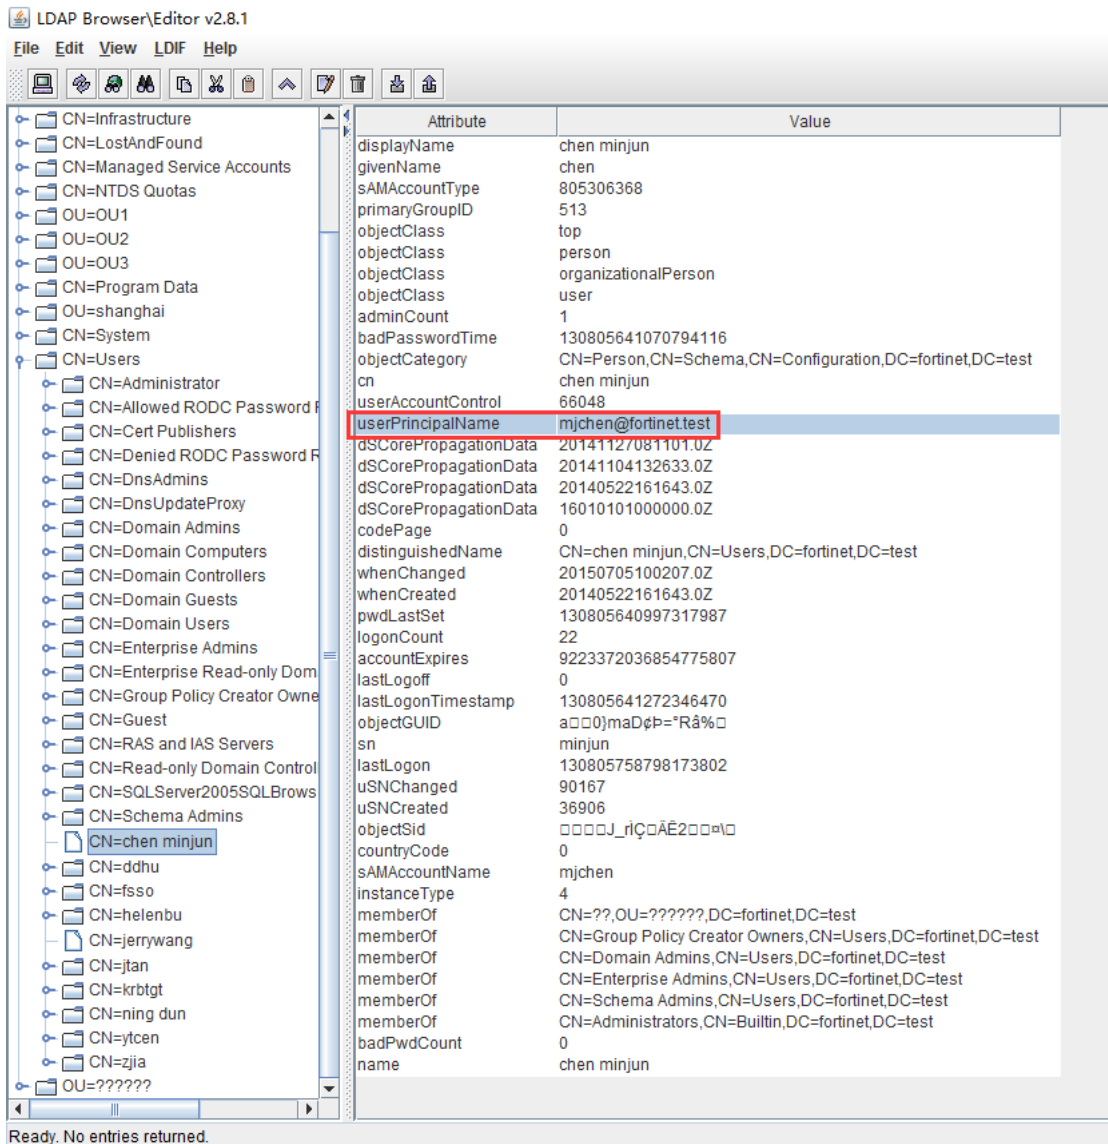

The screenshot shows the LDAP Browser/Editor v2.8.1 interface. The left pane displays a tree view of the LDAP directory structure, with 'CN=chen minjun' selected under 'CN=Users'. The right pane shows the attributes and values for this user. The 'userPrincipalName' attribute is highlighted in red, with the value 'mjchen@fortinet.test'.

Attribute	Value
displayName	chen minjun
givenName	chen
sAMAccountType	805306368
primaryGroupID	513
objectClass	top
objectClass	person
objectClass	organizationalPerson
objectClass	user
adminCount	1
badPasswordTime	130805641070794116
objectCategory	CN=Person,CN=Schema,CN=Configuration,DC=fortinet,DC=test
cn	chen minjun
userAccountControl	66048
userPrincipalName	mjchen@fortinet.test
dSCorePropagationData	20141127081101.0Z
dSCorePropagationData	20141104132633.0Z
dSCorePropagationData	20140522161643.0Z
dSCorePropagationData	16010101000000.0Z
codePage	0
distinguishedName	CN=chen minjun,CN=Users,DC=fortinet,DC=test
whenChanged	20150705100207.0Z
whenCreated	20140522161643.0Z
pwdLastSet	130805640997317987
logonCount	22
accountExpires	9223372036854775807
lastLogoff	0
lastLogonTimestamp	130805641272346470
objectGUID	a000}maDp="Rá%□
sn	minjun
lastLogon	130805758798173802
uSNChanged	90167
uSNCreated	36906
objectSid	□□□□_r1□□ÃË2□□□□
countryCode	0
sAMAccountName	mjchen
instanceType	4
memberOf	CN=??,OU=??????,DC=fortinet,DC=test
memberOf	CN=Group Policy Creator Owners,CN=Users,DC=fortinet,DC=test
memberOf	CN=Domain Admins,CN=Users,DC=fortinet,DC=test
memberOf	CN=Enterprise Admins,CN=Users,DC=fortinet,DC=test
memberOf	CN=Schema Admins,CN=Users,DC=fortinet,DC=test
memberOf	CN=Administrators,CN=Builtin,DC=fortinet,DC=test
badPwdCount	0
name	chen minjun

2. LDAP 配置

Name	<input type="text" value="ldap"/>
Server IP/Name	<input type="text" value="192.168.4.130"/>
Server Port	<input type="text" value="389"/>
Common Name Identifier	<input type="text" value="UserPrincipalName"/>
Distinguished Name	<input type="text" value="dc=fortinet,dc=test"/> <input type="button" value="Fetch DN"/>
Bind Type	<input type="radio"/> Simple <input type="radio"/> Anonymous <input checked="" type="radio"/> Regular
User DN	<input type="text" value="cn=administrator,cn=users,dc=fortinet,dc=test"/>
Password	<input type="password" value="••••••"/>
<input type="checkbox"/> Secure Connection	
<input type="button" value="Test"/>	

文档参考

[How to use user@domain on LDAP](#)